



SWG 100 CEM

STATIONARY ANALYZER


for Continuous Emission Monitoring

O₂ | CO | NO | NO₂ | SO₂ | CO₂ | CH₄



SWG 100 CEM	
CH ₄	60.54
CO ₂	38.83
WZS	198
O ₂	0.3
Net cal. vol.	19.7
Gross cal. vol.	21.9
SWG 100 CEM	

SWG 100
CEM



EMISSION MONITORING SYSTEM

SWG 100 CEM

Low cost, reliable system for emission monitoring and combustion checking of various industrial sites, using extractive method, and tailored to your needs.

The complete, ready to use flue gas analyzer SWG100 CEM is the low-cost industrial solution to be used with a wide variety of emission sources:

- ▶ small power plants, small gas turbines
- ▶ cogeneration heat and power engines (CHP)
- ▶ waste incinerators, ovens, and kilns
- ▶ industrial heaters and dryers
- ▶ food industry steam boilers
- ▶ biomethane and methane boilers
- ▶ ethanol and palm oil plants and more

STANDARD

- Basic analyzer for wall or rack mounting, IP54 protection, aluminum cabinet with anti-corrosive red structural lacquer and fan ventilation
- Thermoelectric gas cooler (Peltier) with constant dew point and condensate monitoring and alarm
- Monitored ambient air ventilation, with alarm display for fan rotation failure
- Sample gas pump and internal sample flow monitoring with alarm in case of filter clogging
- Solenoid valve for auto-zero with ambient air and for auto-calibration with span gas
- 1/8" threads for all sample gas, zero gas and calibration gas inlets, fittings for DN6/4mm tube
- 3,5" TFT color, backlit display and keyboard, password protected operation
- RS485 digital data transfer (Modbus RTU)
- Universal power supply 90 - 240 Vac / 47-63 Hz / 90 W

Thermoelectric gas cooler Peltier type with condensate monitoring and alarm


Condensate draining pump

Regulated gas sampling pump

Universal power supply 90-240 Vac 47-63 Hz / 90 W

Cabinet heater 200W freeze protection

Continuous monitored ventilation fan with alarm

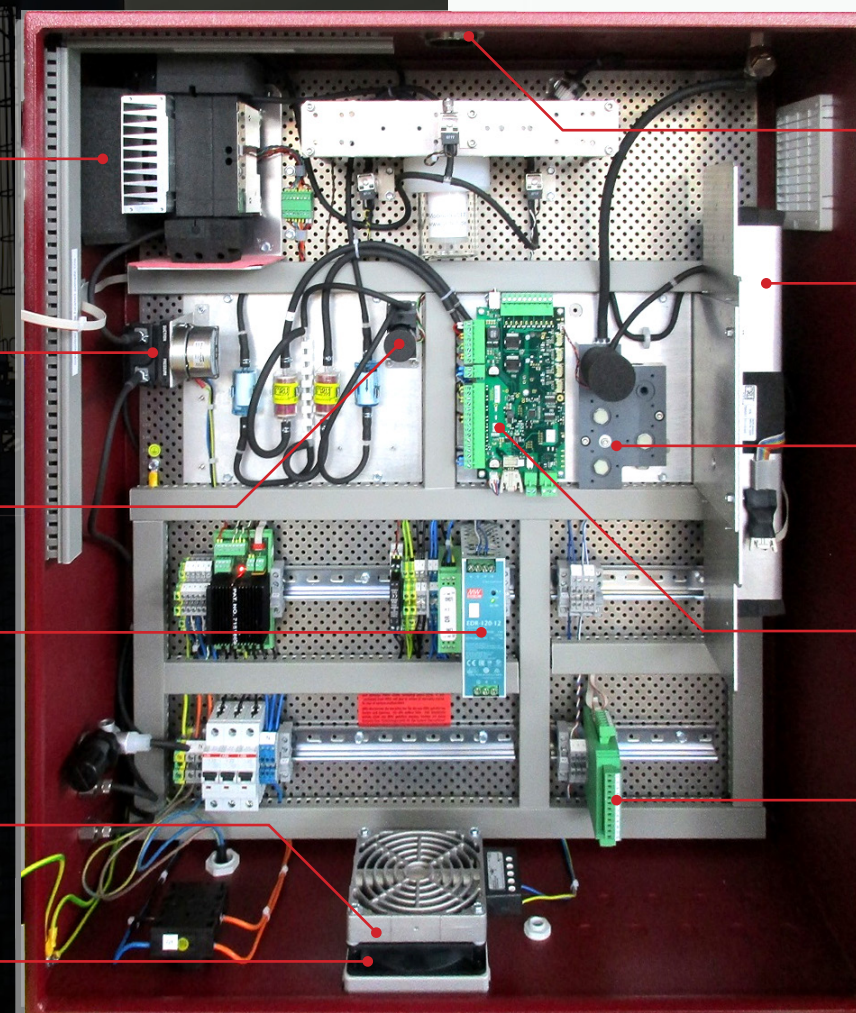

Sample gas inlet with heated or unheated gas sampling line

NDIR bench for CO2 measurement or optional for CO/CO2/CH4

EC cells for O2/CO /NO/NO2/ SO2 with cut-off and purge for CO cell

Main pcb

Modules with analog outputs 4 channel 4-20 mA, RS485 and 2x alarm relays

Instrument main features are:

- ▶ very compact industrial design, for up to 6 gas simultaneous measurement
- ▶ using low cost but reliable electrochemical cells for O2, CO, NO, NO2, SO2
- ▶ and infrared module (ndir) for CO2 measurement or 3-gas ndir for CO/CO2/CH4
- ▶ advanced sample gas preparation for fast and reliable measurements
- ▶ flexible platform can be used for various combustion applications
- ▶ direct and continuous/discontinuous measurement, with pressure and temperature
- ▶ compensation of all main flue gas parameters
- ▶ external measurements (temperature, pressure, etc) by reading of ext. standard signal
- ▶ simple installation, ready to run delivery and easy to maintain

OPTIONAL

- O2 measurement with long-life EC cell
- CO measurement with protected EC cell using cut-off solenoid valve and air purging pump
- NO measurement with EC cell
- NO2 measurement with EC cell
- SO2 measurement with EC cell
- CO2 measurement using infrared (NDIR) module or CO/CO2/CH4 with 3-gas infrared (NDIR) module
- Heated gas sampling probe model HD, with ceramic filter and back-purge, for flying ash type flue gases
- Heated gas sampling probe model HD-GW, with quartz glass wool filter for acid mist flue gases
- Unheated gas sampling probe model LD, for clean combustions, using in-situ sintered metal filter
- Heated gas sampling lines, from 5 to 75 m length, with temperature regulation by analyzer or by internal thermostat, with single or dual PTFE 4/6 mm tube
- Module with 4 channel analog outputs/inputs 4-20 mA, with 2x "fail safe" alarm relays
- Converter module of RS485 into Profibus
- Cabinet heater for freeze protection

SWG 100 CEM

TECHNICAL SPECIFICATIONS

Measurement components		Measuring range	Accuracy	Measuring method
O ₂	Oxygen	0 ... 25 %	0.2 % abs.	electrochemical
CO	Carbon monoxide	0 ... 10,000 ppm	±10 ppm or 3 % reading	electrochemical
NO	Nitric oxide	0 ... 4,000 ppm	± 5 ppm or 3 % reading	electrochemical
NO ₂	Nitrogen dioxide	0 ... 1,000ppm	± 5 ppm or 3 % reading	electrochemical
SO ₂	Sulfur dioxide	0 ... 4,000ppm	±10 ppm or 3 % reading	electrochemical
CO ₂	Carbon dioxide	0 ... 40 %	±0.3 % or 3 % reading	NDIR

Zero drift	Negligible with automatic zeroing
Drift	Less 0.2 % of range per month
Calculated component	<ul style="list-style-type: none"> • True NO_x: NO + NO₂ • Calc. NO_x = 1.05*NO (if NO₂ is not measured) • All emissions relevant mg/Nm³; user selectable O₂ referencing • Combustion efficiency (fuel type depending), heat loss, dewpoint
HMI human machine interface	<ul style="list-style-type: none"> • 3.5" TFT color and backlit display • Keyboard and password protected operation • I/O module with 4channel, analog out 4-20 mA, floating, max. load 500 R and 2 alarm relays, potential free contacts 24 Vdc/5 A • SD-card for data and event logging • RS485 digital interface (Modbus RTU) • DIN-rail RS485 / Profibus converter
Sample preparation	<ul style="list-style-type: none"> • Gas sampling probe HD, heated ceramic filter with back-purge, or gas sampling probe HD-GW, heated quartz wool filter, or gas sampling probe LD, non-heated with in-situ sintered filter • Heated or non-heated DN4/6 mm PTFE sampling line • Thermoelectric gas cooler (Peltier type) with constant 41°F (+5 °C) dewpoint • Teflon particulate filter, internal Viton hosing • Controlled and regulated gas sampling pump • Constant gas sample flow of 50 l/h • Sample inlet pressure: -80 inH₂O to 80 inH₂O (-200 mbar to +200 mbar) • Sample venting: atmospheric pressure
Cabinet dimensions	Aluminum with anti-corrosive structural painting 27.55" x 23.61" x 8.26" (700 x 600 x 210 mm) (H x W x D) for wall or rack mounting
Weight / Protection	55lbs (25kg) / IP54
Ambient temperature	41°F...113°F standard, 41°F...131°F with Vortex cooler, 14°F...113°F with cabinet heater +5°C...+45°C standard, +5°C...+55°C with Vortex cooler, -10°C...+45°C with cabinet heater
Installation site	Indoor or outdoor (rain and sun shade is mandatory user scope of supply)
Cabinet conditioning	<ul style="list-style-type: none"> • Continuous, monitored fan ventilation • Cabinet heater 200 W • Cabinet Vortex cooler (requires 0,5m³/min clean and dry compressed air)
Power supply	Universal 90 - 240 Vac / 47 - 63 Hz / 90 W (300 W with cabinet heater)

Data subject to change without notice



MRU Instruments, Inc.
 Humble, TEXAS 77396 USA
 Tel.: +1 (832) 230-0155 (English)
 Tel.: +52 - 56-2985-1686 (Español)
 Info@mru-instruments.com
 www.mru-instruments.com

Representante de MRU: